



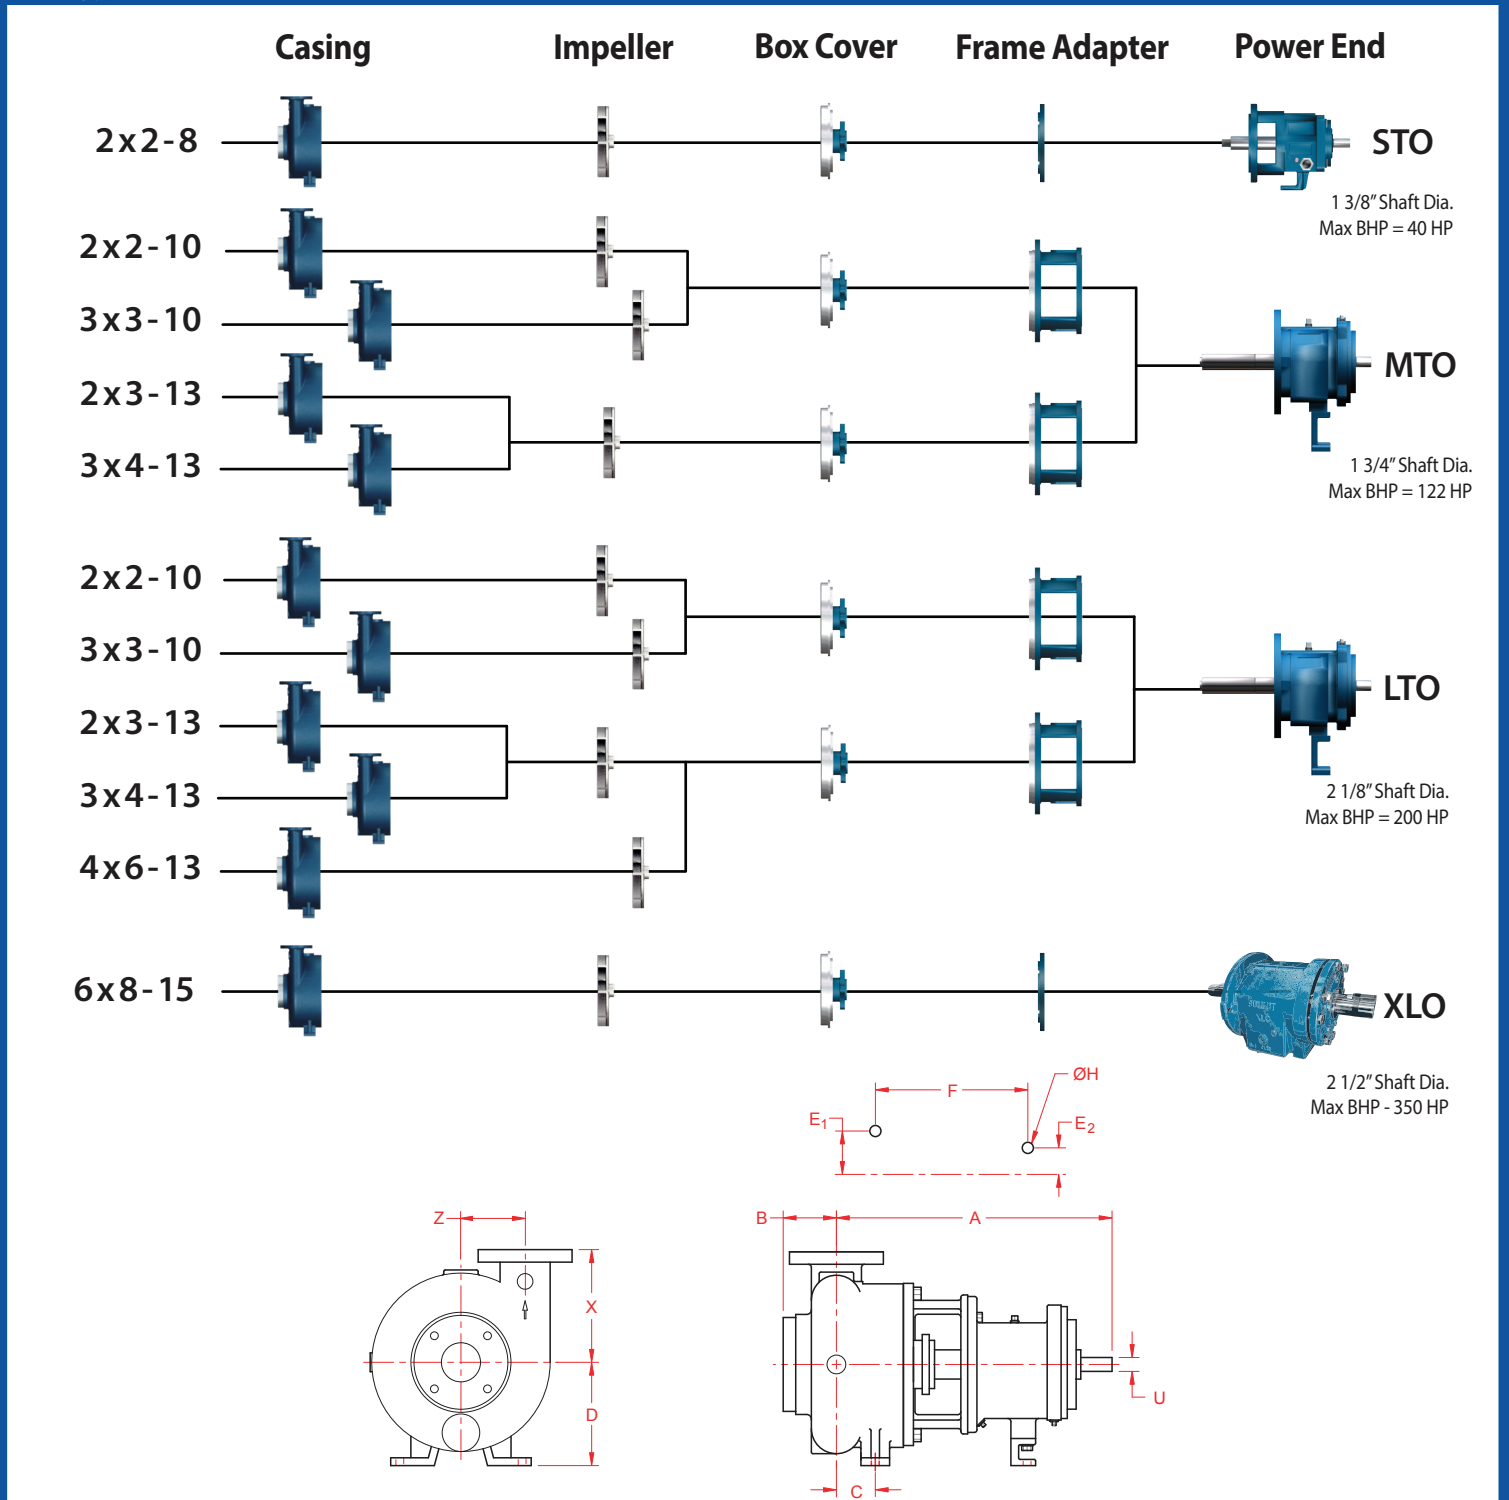

Pump Dimensions													
Pump Frame	Size	X	D	C	B	A	Z	Foot Pattern				Shaft	
								E1	E2	F	H	U	KEYWAY
STO	2x2-8	6 1/2	6	2 1/2	2 3/4	16	4 1/4	3 3/4	0	7 1/4	5/8	0.875	3/16 x 3/32
MTO or LTO	2x2-10	8 1/2	8 1/4	2 1/4	3 1/2	21 3/4	5 1/8	4 7/8	3 5/8	12 1/2		MTO 1.125 or LTO 1.875	MTO 1/4 x 1/8 or LTO 1/2 x 1/4
	3x3-10	9	8 1/4	2 15/16	4 1/4	22 1/2	5 1/8						
	2x3-13	10 1/2	10	2 13/16	4 1/8	22 5/16	6 5/8						
	3x4-13	10 1/2	10	3 5/16	4 1/8	22 13/16	6 5/8						
LTO	4x6-13	11 1/2	10	3 5/8	4 3/4	23 1/8	6 3/4					1.875	1/2 x 1/4
XLO	6x8-15	14	14 1/2	4 7/16	5 3/4	32 1/2	7 3/4	4 1/2	8	18 3/4	7/8	2 3/8	5/8 x 5/16

**2196R**

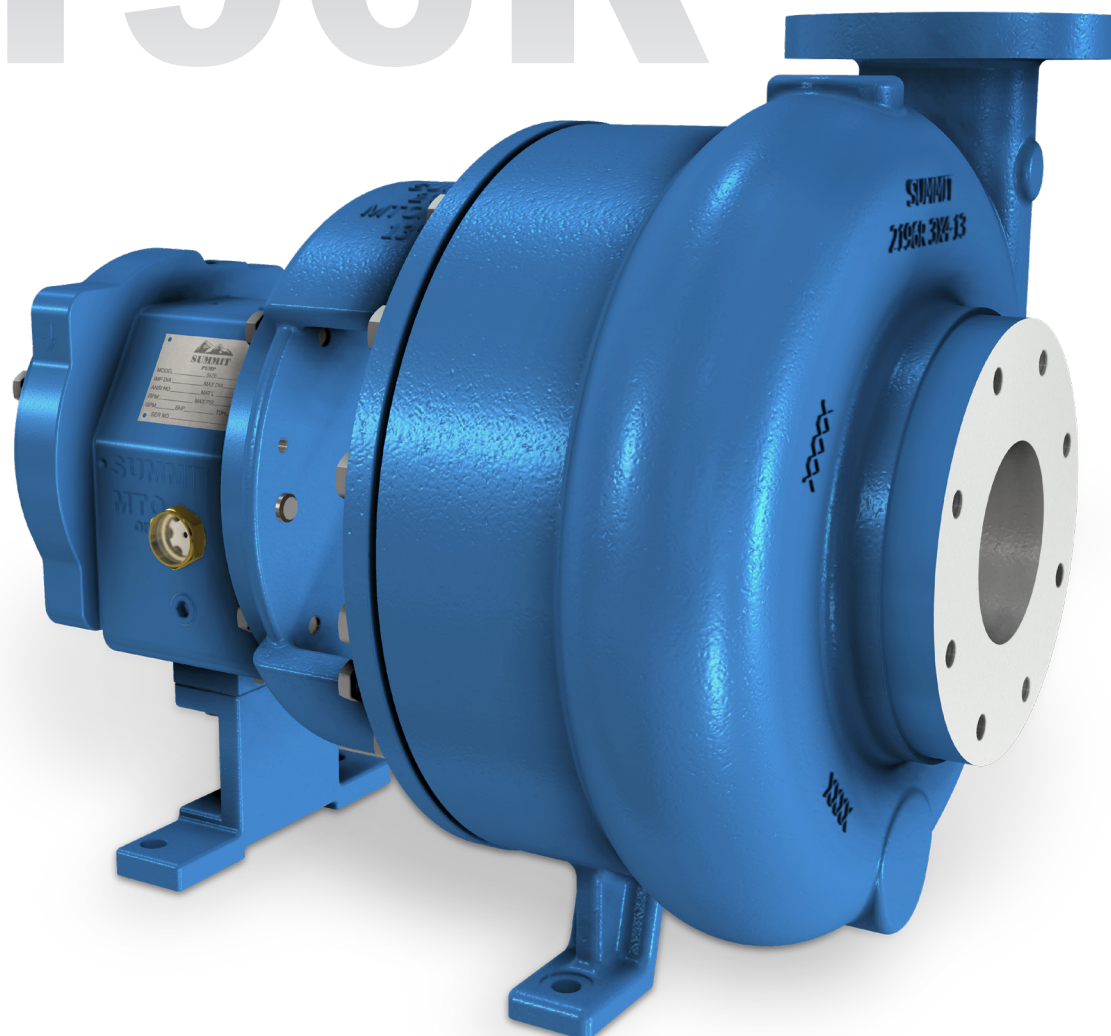


**CAPACITY**
TO 1,750 GPM

**HEAD**
TO 275 FEET





**TEMPERATURE**
TO 500°F

**2196 Recessed
Impeller Pump**

**SUMMIT**
PUMP, Inc
www.SUMMITPUMP.com

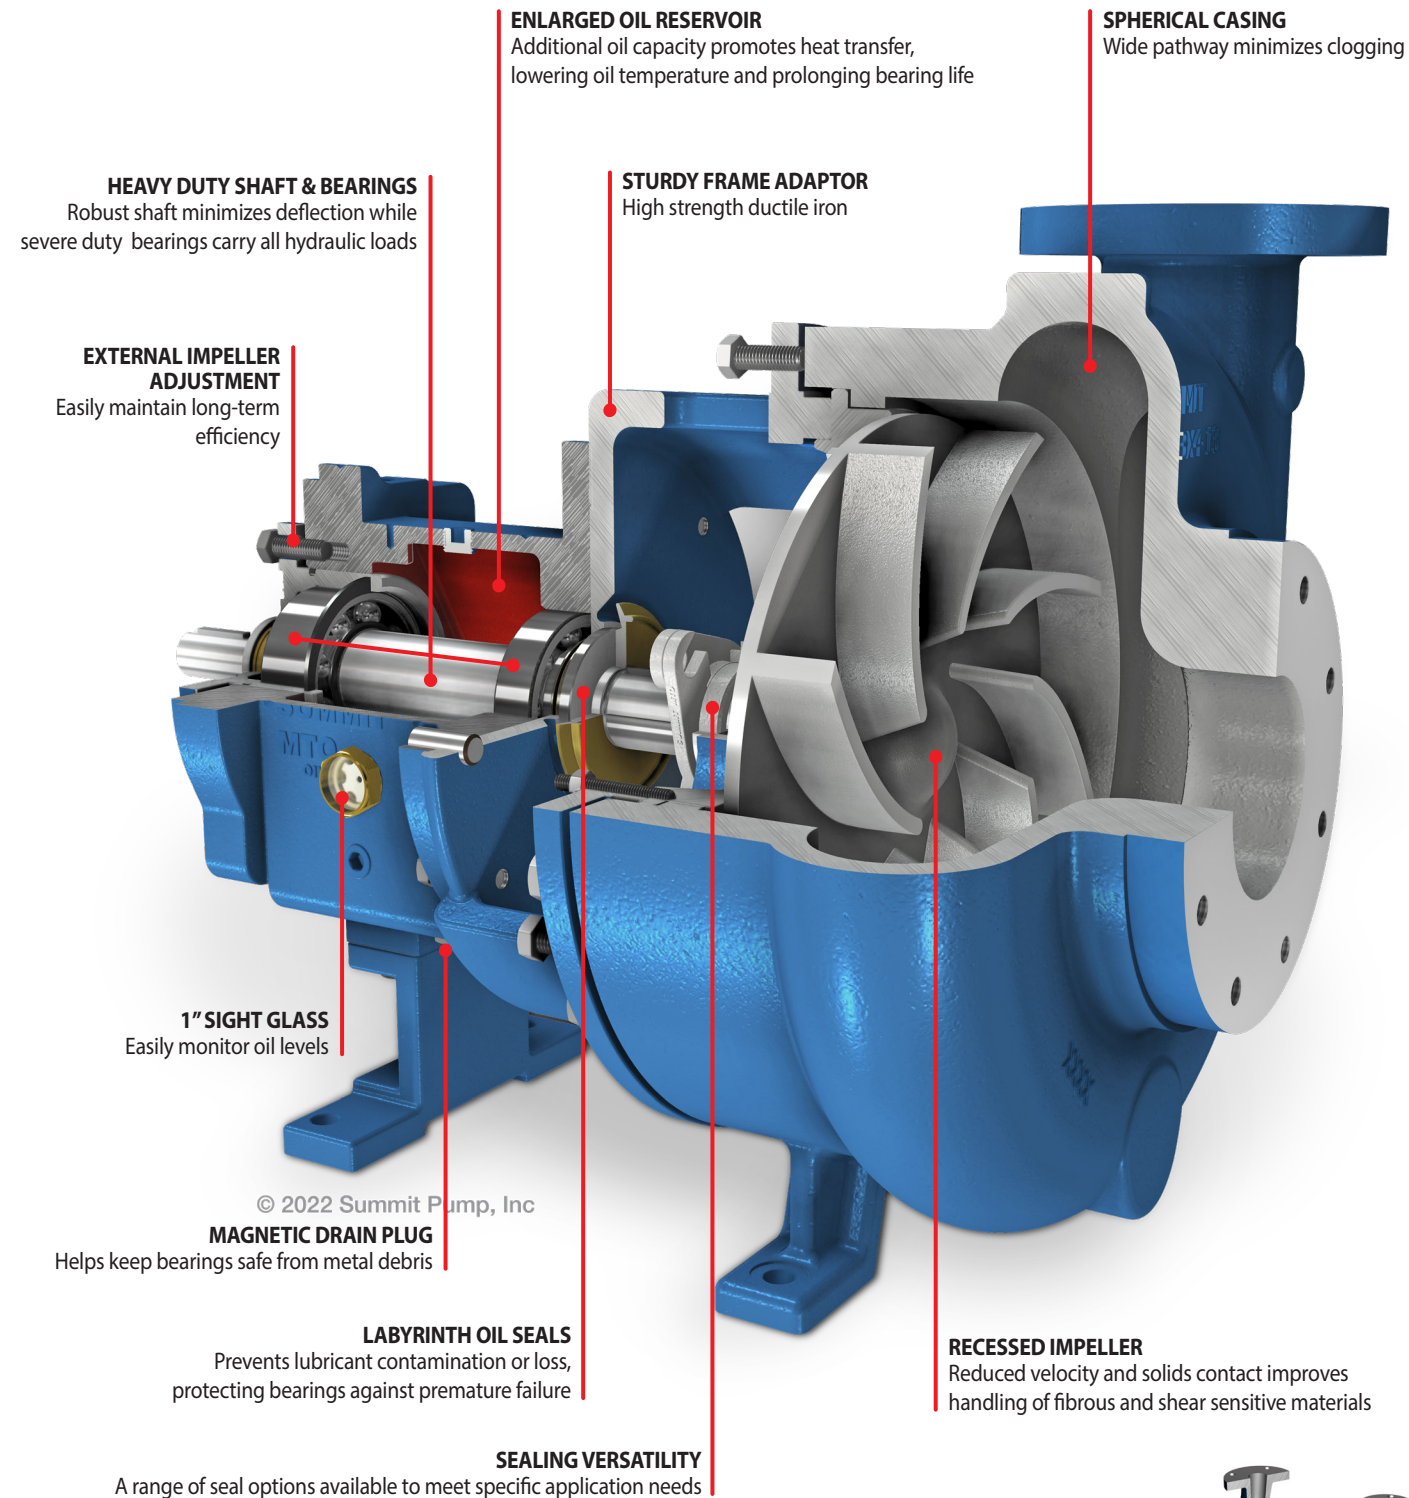

INTERCHANGEABLE PARTS
Power ends and casings are exchangeable throughout the 2196 pump family, helping you reduce inventory and limit downtime

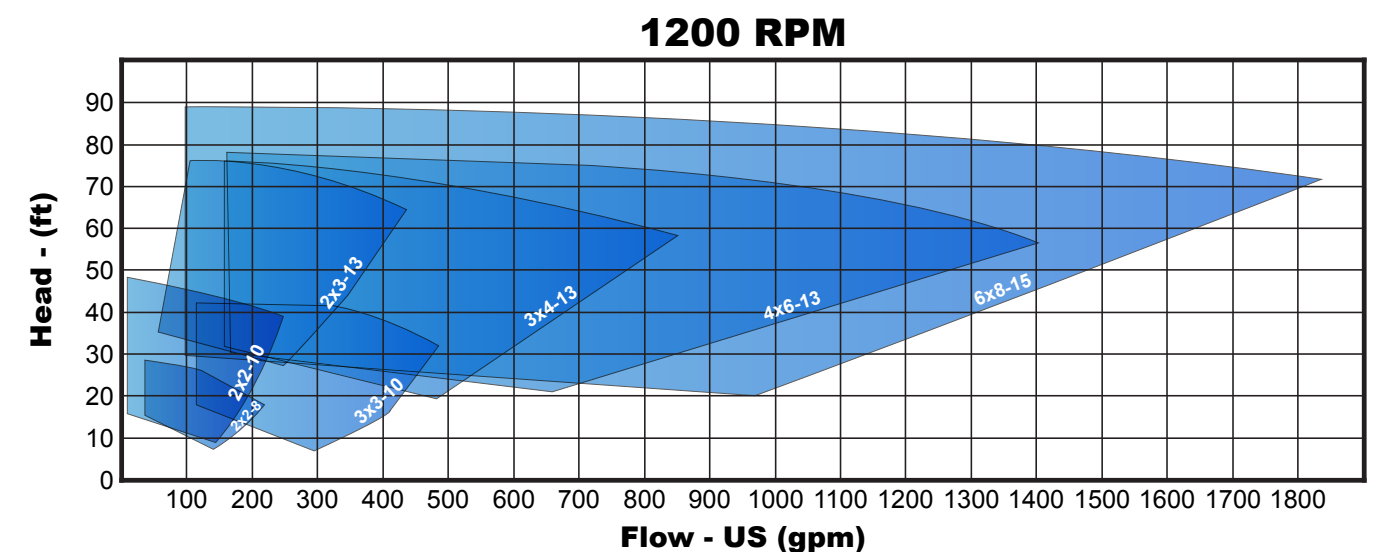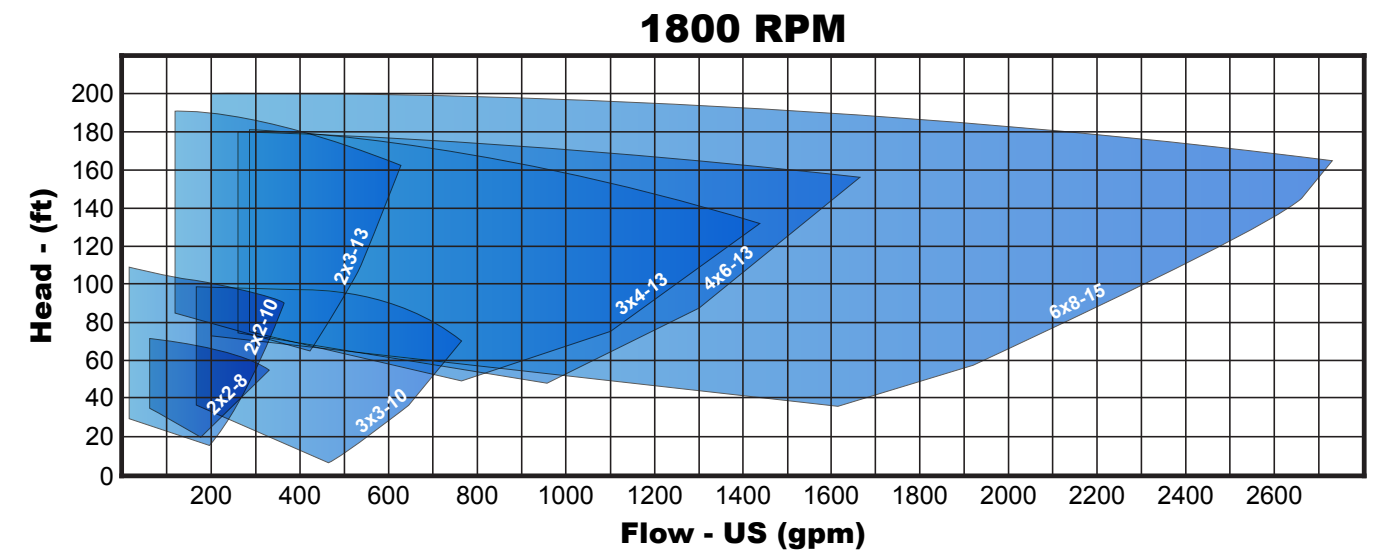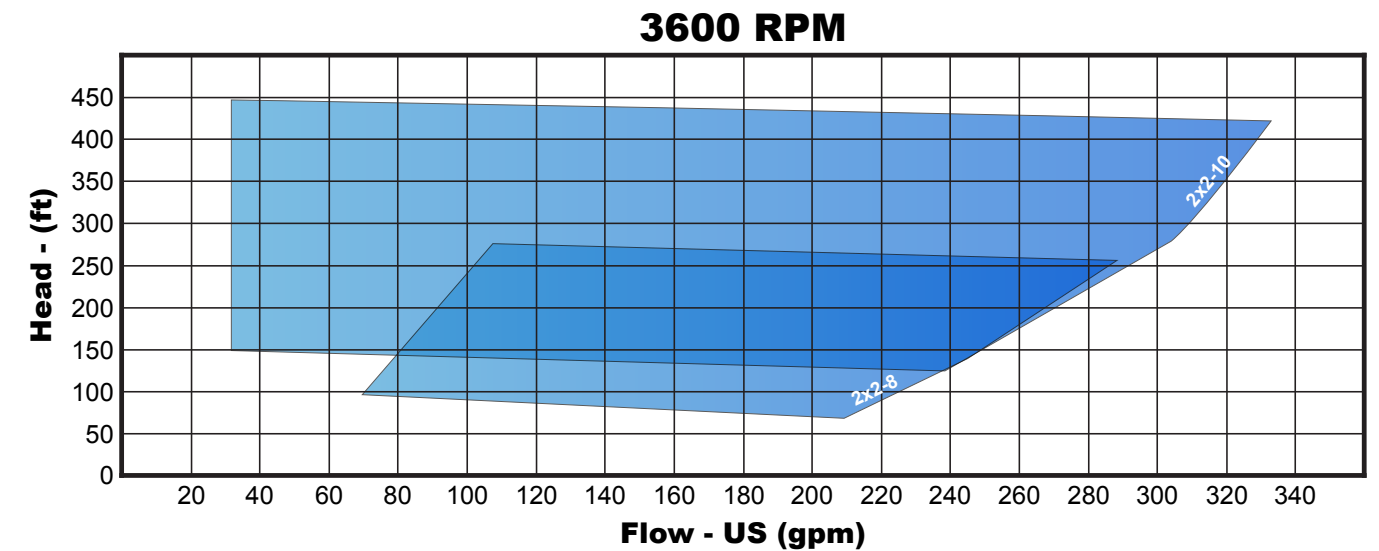

Note: Performance & Sizing curves are provided for reference only.
For specific information, contact your distributor or the manufacturer.